SGS-THOMSON MICROELECTRONICS

2N1613
2N1711

SWITCHES AND UNIVERSAL AMPLIFIERS

DESCRIPTION

The 2N1613 and 2N1711 are silicon planar epitaxial NPN transistors in Jedec TO-39 metal case. They are designed for use in high-performance amplifier, oscillator and switching circuits.

The 2N1711 is also used to advantage in amplifiers where low noise is an important factor.

Products approved to CECC 50002-104 available on request.



TO-39

INTERNAL SCHEMATIC DIAGRAM



ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-base Voltage (I_E = 0)	75	V
V_{CER}	Collector-emitter Voltage ($R_{BE} \leq 10\ \Omega$)	50	V
V_{EBO}	Emitter-base Voltage (I_C = 0)	7	V
I_C	Collector Current	500	mA
P_{tot}	Total Power Dissipation at $T_{amb} \leq 25$ °C at $T_{case} \leq 25$ °C at $T_{case} \leq 100$ °C	0.8 3 1.7	W W W
T_{stg}, T_j	Storage and Junction Temperature	– 65 to 200	°C

THERMAL DATA

$R_{th\ j\text{-}case}$	Thermal Resistance Junction-case	Max	58	°C/W
$R_{th\ j\text{-}amb}$	Thermal Resistance Junction-ambient	Max	219	°C/W

ELECTRICAL CHARACTERISTICS (T_{amb} = 25 °C unless otherwise specified)

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
I_{CBO}	Collector Cutoff Current (I_E = 0)	V_{CB} = 60 V				10	nA
		V_{CB} = 60 V	T_{amb} = 150 °C			10	µA
I_{EBO}	Emitter Cutoff Current (I_C = 0)	V_{EB} = 5 V	for **2N1613**			10	nA
			for **2N1711**			5	nA
$V_{(BR)\ CBO}$	Collector-base Breakdown Voltage	I_C = 0.1 mA		75			V
$V_{(BR)CER}$*	Collector-emitter Breakdown Voltage ($R_{BE} \leq 10\ \Omega$)	I_C = 10 mA		50			V
$V_{(BR)\ EBO}$	Emitter-base Breakdown Voltage (I_C = 0)	I_E = 0.1 mA		7			V
$V_{CE\ (sat)}$*	Collector-emitter Saturation Voltage	I_C = 150 mA	I_B = 15 mA		0.5	1.5	V
$V_{BE\ (sat)}$ *	Base-emitter Saturation Voltage	I_C = 150 mA	I_B = 15 mA		0.95	1.3	V
h_{FE}*	DC Current Gain	for **2N1613**					
		I_C = 0.01 mA	V_{CE} = 10 V		35		
		I_C = 0.1 mA	V_{CE} = 10 V	20	50		
		I_C = 10 mA	V_{CE} = 10 V	35	80		
		I_C = 150 mA	V_{CE} = 10 V	40	80	120	
		I_C = 500 mA	V_{CE} = 10 V	20	55		
		I_C = 10 mA	V_{CE} = 10 V				
		T_{amb} = –55 °C		20	35		
h_{FE}*	DC Current Gain	for **2N1711**					
		I_C = 0.01 mA	V_{CE} = 10 V	20	60		
		I_C = 0.1 mA	V_{CE} = 10 V	35	80		
		I_C = 10 mA	V_{CE} = 10 V		130		
		I_C = 150 mA	V_{CE} = 10 V		130	300	
		I_C = 500 mA	V_{CE} = 10 V		75		
		I_C = 10 mA	V_{CE} = 10 V				
		T_{amb} = 55 °C			65		
h_{fe}	Small Signal Current Gain	for **2N1613**					
		I_C = 1 mA	V_{CE} = 10 V				
		f = 1 kHz		30	70	150	
		for **2N1711**					
		I_C = 1 mA	V_{CE} = 10 V				
		f = 1 kHz		70	135	300	
f_t	Transition Frequency	I_C = 50 mA	V_{CE} = 10 V				
		f = 20 MHz	for **2N1613**	60	80		MHz
			for **2N1711**	70	100		MHz
C_{EBO}	Emitter-base Capacitance	I_C = 0 f = 1 MHz	V_{EB} = 0.5 V		50	80	pF
C_{CBO}	Collector-base Capacitance	I_E = 0 f = 1 MHz	V_{CB} = 10 V		18	25	pF

* Pulsed : pulse duration = 300 µs, duty cycle = 1 %.

ELECTRICAL CHARACTERISTICS (continued)

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
NF	Noise Figure	I_C = 0.3 mA R_g = 510 Ω	V_{CE} = 10 V f = 1 kHz for **2N1613** for **2N1711**		 6 3.5	 12 8	 dB dB
h_{ie}	Input Impedance	I_C = 1 mA f = 1 KHz	V_{CE} = 5 V for **2N1613** for **2N1711**		 2.2 4.4		 kΩ kΩ
h_{re}	Reverse Voltage Ratio	I_C = 1 mA f = 1 kHz	V_{CE} = 5 V for **2N1613** for **2N1711**		 $3.6x10^{-4}$ $7.3x10^{-4}$		
h_{oe}	Output Admittance	I_C = 1 mA f = 1 kHz	V_{CE} = 5 V for **2N1613** for **2N1711**		 12.5 23.8		 µS µS

* Pulsed : pulse duration = 300 µs, duty cycle = 1 %.

TO39 MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	12.7			0.500		
B			0.49			0.019
D			6.6			0.260
E			8.5			0.334
F			9.4			0.370
G	5.08			0.200		
H			1.2			0.047
I			0.9			0.035
L	45° (typ.)					

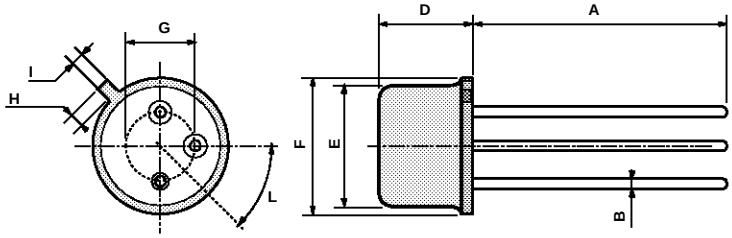

P008B

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsability for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may results from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied.
SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectonics.

© 1994 SGS-THOMSON Microelectronics - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES
Australia - Brazil - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A