New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.
SPRINGFIELD, NEW JERSEY 07081
U.S.A.

TELEPHONE: (973) 376-2922
(212) 227-6005
FAX: (973) 376-8960

MPS-U95 (SILICON)

PNP SILICON DARLINGTON AMPLIFIER TRANSISTOR

. . . designed for amplifier and driver applications.

- High DC Current Gain –
  h_{FE} = 25,000 (Min) @ I_C = 200 mAdc
  15,000 (Min) @ I_C = 500 mAdc
- Collector-Emitter Breakdown Voltage –
  BV_{CES} = 40 Vdc (Min) @ I_C = 100 μAdc
- Low Collector-Emitter Saturation Voltage –
  $V_{CE(sat)}$ = 1.5 Vdc @ I_C = 1.0 Adc
- Monolithic Construction for High Reliability
- Complement to NPN MPS-U45

PNP SILICON DARLINGTON TRANSISTOR

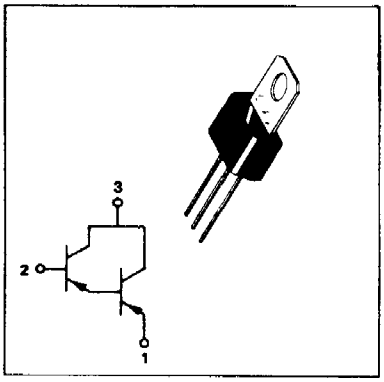

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CES}	40	Vdc
Collector-Base Voltage	V_{CB}	50	Vdc
Emitter-Base Voltage	V_{EB}	10	Vdc
Collector Current -Continuous	I_C	2.0	Adc
Total Power Dissipation @ T_A = 25°C Derate above 25°C	P_D	1.0 8.0	Watt mW/°C
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	10 80	Watts mW/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-55 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	125	°C/W
Thermal Resistance, Junction to Case	$R_{\theta JC}$ (1)	12.5	°C/W

(1) $R_{\theta JA}$ is measured with the device soldered into a typical printed circuit board.



STYLE 1:
PIN 1. EMITTER
2. BASE
3. COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	9.14	9.53	0.360	0.375
B	6.60	7.24	0.260	0.285
C	5.41	5.66	0.213	0.223
D	0.36	0.53	0.015	0.021
F	3.18	3.33	0.125	0.131
G	2.54 BSC		0.100 BSC	
H	3.94	4.19	0.155	0.165
J	0.36	0.41	0.014	0.016
K	12.07	12.70	0.475	0.500
L	25.02	26.53	0.985	1.005
N	5.08 BSC		0.200 BSC	
Q	2.79	2.98	0.094	0.106
R	1.14	1.40	0.045	0.055

CASE 152-02

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

Quality Semi-Conductors

MPS-U95 (continued)

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Breakdown Voltage (I_C = 100 μAdc, V_{BE} = 0)	BV_{CES}	40	–	–	Vdc
Collector-Base Breakdown Voltage (I_C = 100 μAdc, I_E = 0)	BV_{CBO}	50	–	–	Vdc
Emitter-Base Breakdown Voltage (I_E = 10 μAdc, I_C = 0)	BV_{EBO}	10	–	–	Vdc
Collector Cutoff Current (V_{CB} = 30 Vdc, I_E = 0)	I_{CBO}	–	–	100	nAdc
Emitter Cutoff Current (V_{EB} = 8.0 Vdc, I_C = 0)	I_{EBO}	–	–	100	nAdc
ON CHARACTERISTICS(1)					
DC Current Gain (I_C = 200 mAdc, V_{CE} = 5.0 Vdc) (I_C = 500 mAdc, V_{CE} = 5.0 Vdc) (I_C = 1.0 Adc, V_{CE} = 5.0 Vdc)	h_{FE}	 25,000 15,000 4,000	 43,000 41,000 35,000	 150,000 – –	–
Collector-Emitter Saturation Voltage (I_C = 1.0 Adc, I_B = 2.0 mAdc)	$V_{CE(sat)}$	–	1.0	1.5	Vdc
Base-Emitter Saturation Voltage (I_C = 1.0 Adc, I_B = 2.0 mAdc)	$V_{BE(sat)}$	–	1.85	2.0	Vdc
Base-Emitter On Voltage (I_C = 1.0 Adc, V_{CE} = 5.0 Vdc)	$V_{BE(on)}$	–	1.7	2.0	Vdc
DYNAMIC CHARACTERISTICS					
Small-Signal Current Gain (1) (I_C = 200 mAdc, V_{CE} = 5.0 Vdc, f = 100 MHz)	$\lvert h_{fe} \rvert$	0.5	1.6	–	–
Collector Base Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 1.0 MHz)	C_{cb}	–	2.5	12	pF

(1)Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

Uniwatt darlington transistors can be used in any number of low power applications, such as relay drivers, motor control and as general purpose amplifiers. As an audio amplifier these devices, when used as a complementary pair, can drive 3.5 watts into a 3.2 ohm speaker using a 14 volt supply with less than one per cent distortion. Because of the high gain the base drive requirement is as low as 1 mA in this application. They are also useful as power drivers for high current application such as voltage regulators.