G1338-S SERIES



SPECIFICATIONS


SIZE	130×130×38 mm
TYPE	Thermal-Lock protection
HOUSING	Boost Performance, Flange
IMPELLER	High Airflow/Low Noise
BEARING	Ball
WEIGHT	335 g

AVAILABLE OPTIONS


- Tachometer output signal
- PWM duty control
- Locked rotor output signal

Custom added-value options: special lead wired, connector installations, etc.

DIMENSIONS

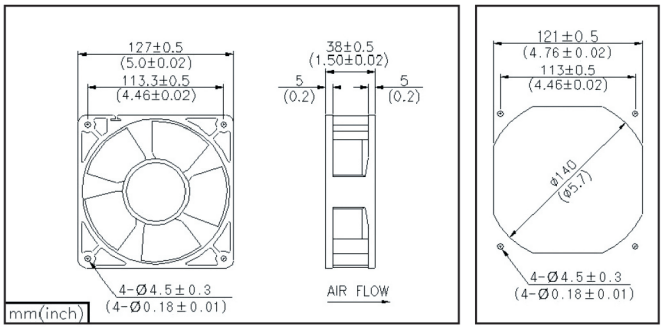

PERFORMANCE CURVE

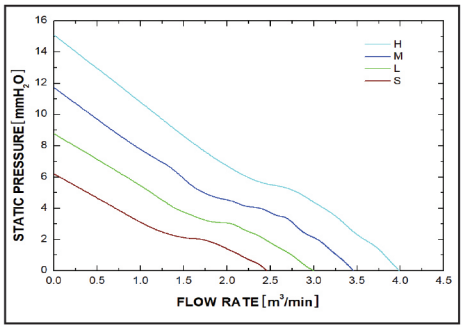

Model	Rated			Speed [RPM]	Operating Voltage [VDC]	Performance (At Rated Speed)				
	Voltage [VDC]	Current Max.[mA]	Power Max. [W]			Air Flow Max.		Static Pressure Max.		Noise [dBA]
						[m³/min]	[CFM]	[mmH2O]	[inH2O]	
G1338S12	12	350	4.20	2,000	10~14	2.46	87	6.22	0.24	37
G1338L12	12	550	6.60	2,400	10~14	3.00	106	8.77	0.35	42
G1338M12	12	850	10.20	2,800	10~14	3.46	122	11.73	0.46	46
G1338H12	12	1200	14.40	3,200	10~14	3.99	141	15.10	0.59	49
G1338S24	24	220	5.30	2,000	20~28	2.46	87	6.22	0.24	37
G1338L24	24	330	7.90	2,400	20~28	3.00	106	8.77	0.35	42
G1338M24	24	480	11.50	2,800	20~28	3.46	122	11.73	0.46	46
G1338H24	24	650	15.60	3,200	20~28	3.99	141	15.10	0.59	49
G1338S48	48	130	6.20	2,000	40~52	2.46	87	6.22	0.24	37
G1338L48	48	180	8.60	2,400	40~52	3.00	106	8.77	0.35	42
G1338M48	48	250	12.00	2,800	40~52	3.46	122	11.73	0.46	46
G1338H48	48	330	15.80	3,200	40~52	3.99	141	15.10	0.59	49

※ Speed range at rated voltage is ±10% of rated speed.