New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.
SPRINGFIELD, NEW JERSEY 07081
U.S.A.

TELEPHONE: (973) 376-2922
(212) 227-6005
FAX: (973) 376-8960

MPS-U05 (SILICON)
MPS-U06


NPN SILICON ANNULAR AMPLIFIER TRANSISTORS

. . . designed for general-purpose, high-voltage amplifier and driver applications.

- High Collector-Emitter Breakdown Voltage –
  BV_{CEO} = 60 Vdc (Min) @ I_C = 1.0 mAdc – MPS-U05
  80 Vdc (Min) @ I_C = 1.0 mAdc – MPS-U06
- High Power Dissipation – P_D = 10 W @ T_C = 25°C
- Complements to PNP MPS-U55 and MPS-U56

NPN SILICON AMPLIFIER TRANSISTORS



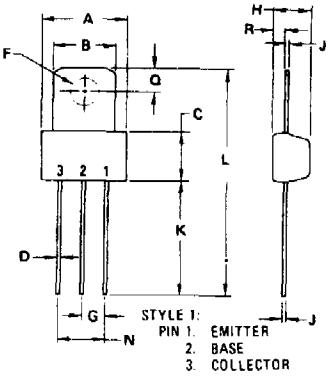

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	9.14	9.53	0.360	0.375
B	6.60	7.24	0.260	0.285
C	5.41	5.66	0.213	0.223
D	0.38	0.53	0.015	0.021
F	3.18	3.33	0.125	0.131
G	2.54 BSC		0.100 BSC	
H	3.94	4.19	0.155	0.165
J	0.36	0.41	0.014	0.016
K	12.07	12.70	0.475	0.500
L	25.02	25.53	0.985	1.005
N	5.08 BSC		0.200 BSC	
Q	2.39	2.69	0.094	0.106
R	1.14	1.40	0.045	0.055

CASE 152-02

MAXIMUM RATINGS

Rating	Symbol	MPS-U05	MPS-U06	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	Vdc
Collector-Base Voltage	V_{CB}	60	80	Vdc
Emitter-Base Voltage	V_{EB}	4.0		Vdc
Collector Current – Continuous	I_C	2.0		Adc
Total Power Dissipation @ T_A = 25°C Derate above 25°C	P_D	1.0 8.0		Watt mW/°C
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	10 80		Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-55 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	12.5	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$(1)	125	°C/W

(1) $R_{\theta JA}$ is measured with the device soldered into a typical printed circuit board.

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

Quality Semi-Conductors

MPS-U05, MPS-U06 (continued)

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Breakdown Voltage (I_C = 1.0 mAdc, I_B = 0)	MPS-U05 MPS-U06	BV_{CEO}	 60 80	 – –	 – –	Vdc
Emitter-Base Breakdown Voltage (I_E = 100 μAdc, I_C = 0)		BV_{EBO}	4.0	–	–	Vdc
Collector Cutoff Current (V_{CB} = 40 Vdc, I_E = 0) (V_{CB} = 60 Vdc, I_E = 0)	MPS-U05 MPS-U06	I_{CBO}	 –	 –	 100 100	nAdc
ON CHARACTERISTICS						
DC Current Gain (1) (I_C = 50 mAdc, V_{CE} = 1.0 Vdc) (I_C = 250 mAdc, V_{CE} = 1.0 Vdc) (I_C = 500 mAdc, V_{CE} = 1.0 Vdc)		h_{FE}	 80 60 –	 125 100 55	 – – –	–
Collector-Emitter Saturation Voltage(1) (I_C = 250 mAdc, I_B = 10 mAdc) (I_C = 250 mAdc, I_B = 25 mAdc)		$V_{CE(sat)}$	 – –	 0.18 0.1	 0.4 –	Vdc
Base-Emitter On Voltage (1) (I_C = 250 mAdc, V_{CE} = 5.0 Vdc)		$V_{BE(on)}$	–	0.74	1.2	Vdc
SMALL-SIGNAL CHARACTERISTICS						
Current-Gain–Bandwidth Product (1) (I_C = 200 mAdc, V_{CE} = 5.0 Vdc, f = 100 MHz)		f_T	50	170	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 100 kHz)		C_{ob}	–	6.0	12	pF

(1)Pulse Test: Pulse Width ≤300 μs, Duty Cycle ≤2.0%.

FIGURE 1 – DC CURRENT GAIN

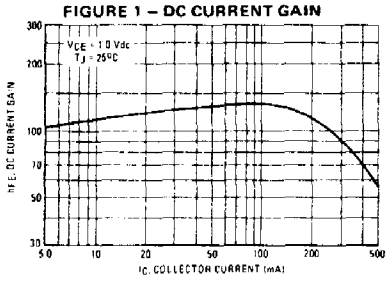


FIGURE 2 – "ON" VOLTAGES

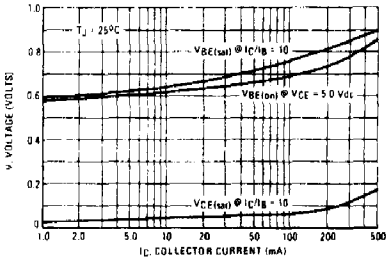


FIGURE 3 – DC SAFE OPERATING AREA


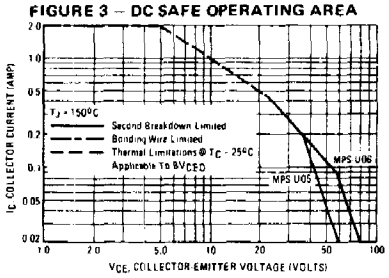


FIGURE 4 – CURRENT-GAIN–BANDWIDTH PRODUCT

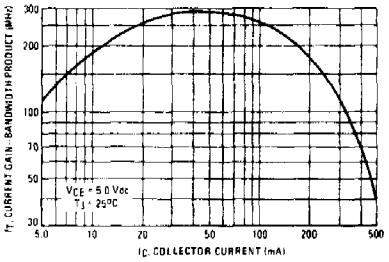

There are two limitations on the power handling ability of a transistor: junction temperature and second breakdown. Safe operating area curves indicate I_C – V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 3 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.